


Millboard® Decking Edge Boards and Step Edges

Wear resistant edge boards and Step edges.

We recommend that the purpose made step edges are fitted at steps and bull nosed or flat boards at edges of decking to protect the ends of the deck boards from excessive wear and to enhance the finish deck area where they can act as a positive edge to changes in levels.

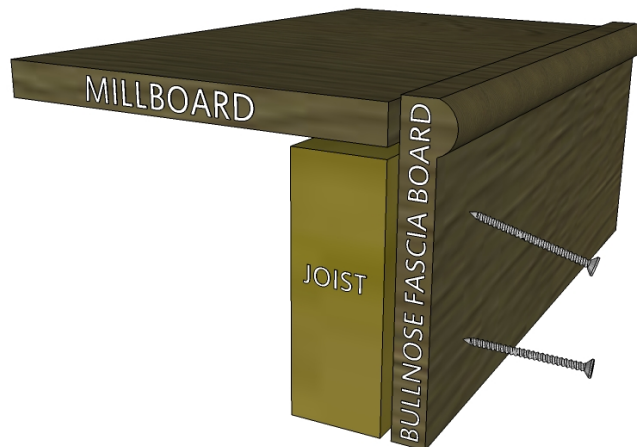

Edge boards are available as a wear resistant bullnose version, above, or as a standard flat board, below. Both are available as rigid and flexible. The flexible type boards must be warmed to at least room temperature before attempting gentle bending, and then fixed with cap head screws. 300mm intervals should be observed between fixing points to be assured of correct fixing into pre-drilled holes.

